
DRAWING REF: DM/L



Details required for manufacture

of FIXED AND ADJUSTABLE LOUVRES

McKenzie-Martin Ltd.

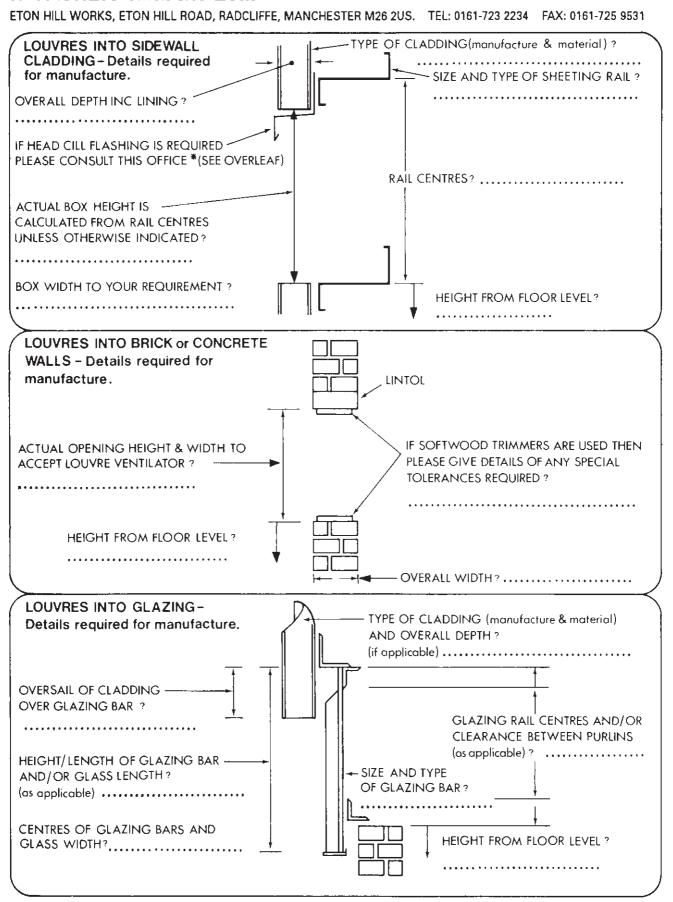

Please complete the following if applicable:-

(It may be useful to refer to our recommended fixing instructions for guidance)

(1) If flanges are required, is the box depth of the louvre to be located internally or externally in relation to the building line i.e. are the louvre flanges to be located to the front, intermediate or rear of box depth? Below are some typical alternatives which may be of assistance.

FRONT OF UNIT SIDE VIEWS

- (2) If you have any alternative or special flange requirements, please sketch your details overleaf.
- (3) If the unit incorporates either Bird Guards, Security Mesh or Fly Mesh are they to be fitted internally or externally?

CONTROL DETAILS

(4) If fusible links are fitted to operating louvres, are they to be set to open or close the units when activated in the event of a fire?